


ALZM08A

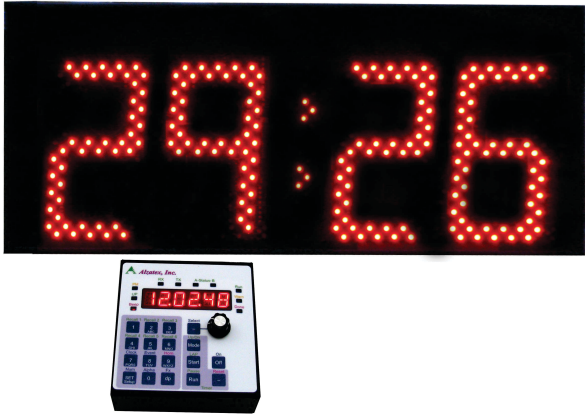

Product

Presentation Timer w/ Large LED Display

Description:

This presentation TimeKeeper™ system includes a TMR216B Count Up/Down Timer with six programmable presets, and a DSP704B Large Four-digit LED wall Display visible (up to 200ft) to the speaker and the audience.

Item: ALZM08A

UPC: 788581650080

EAN: 0788581650080

Stock Status: Usually in stock.

Dimensions: 26.0" x 10.5" x 2.5"

Weight: 16.3 lbs.

MSRP: \$1,499.00

Specifications:

- Two Serial data RJ11 connectors for accessories.
- One RS422 output with RJ45 connector for accessories.
- Ground closure 600mA output for optional beeper. (not included).
- Timer Construction: Metal enclosure, black powder coated finish.
- Display Construction: Metal enclosure, black powder coated finish.
- Power requirements: 10-18 VAC or 12-24 VDC power.
- Current consumption: 900ma.
- TMR221B8_SM Dimensions: 4.5" x 4.5" x 1.25".
- DSP704B Dimensions: 25.5" x 10.5" x 2.5".

Features:

- Count up elapsed timer settable to Hour:Min or Min:Sec.
- Count down time remaining timer settable to Hour:Min or Min:Sec.
- Easy to use. Press Reset. Turn knob to set the desired time. Press Start.
- Subsequent timing cycles. Press Reset. The time previously used will be loaded. Press Start.
- Green, Yellow and Red warning indicators have preprogrammed settings to match Toastmasters requirements, or may be programmed by user.
- Four-digit LED seven-segment Display with 0.56 inch high digits.
- Beeper provides audible sound when timer reaches zero.
- Button to turn beeper on/off.
- Built in Time of day clock displays 12 or 24 hour mode.
- Connect two or more TimeKeepers™ together. One becomes the Timer, and the others become remote Displays.
- Made of ruggedized aluminum construction.
- Convenience is important to most people. This gives you an advantage as Alzatex timers are easy to use. The real benefit to you is a very quick learning curve.

Item Includes:

- (1) TMR216B Count up/down timer.
- (1) DSP704B Large LED Display.
- (1) WT12VAC1200MA-RA 12V AC, 1200mA Transformer.
- (1) M8BK025F 25ft cat-5 cable.
- (1) RC Reference card.
- (1) WD Wiring diagram.

Optional Accessories:

- (1) RYG11ABBK Red-Yellow-Green Indicator Lamps.
- (1) RYG472AB Red-Yellow-Green Indicator Lamps.
- (1) DSP1016B0 Quad 4-Digit LED display with 1 inch high digits.
- (1) DSP254B 4-Digit LED display with 2-1/3 inch high digits.
- (1) DSP256B 4-Digit LED display with 2-1/3 inch high digits.
- (1) DSP418B LED display with four 4-inch high digits, four 1-inch high digits and RYG lamps.
- (1) DSP504B 4-Digit LED display with 5 inch high digits.
- (1) DSP506B 6-Digit LED display with 5 inch high digits.
- (1) DSP704B 4-Digit LED display with 7 inch high digits.
- (1) DSP706B 6-Digit LED display with 7 inch high digits.
- (1) DSP1004B 4-Digit LED display with 10 inch high digits.

- (1) DSP1006B 6-Digit LED display with 10 inch high digits.
- (1) RYG11ABBK Red-Yellow-Green Indicator Lamps with 1/2 inch domes.
- (1) RYG200A Red-Yellow-Green Indicator lamps with 2 inch LED clusters.
- (1) RYG472AB Red-Yellow-Green Indicator Lamps with 4 inch LED clusters.
- (1) PS60W150 15VDC, 4A Power Supply with 6ft power cord.
- (1) ADD-BEEP Loud Beeper.